**In Wall****C-CLIMA4\_**

4 outputs programmable thermostat with or without RF for keypad with display

**Technical data**

Power supply 110/230 V ~ 50/60 Hz  
 Maximum current 5 A cos  $\Phi = 1$   
 Ingress protection IP IP20

Note:

It is necessary the touch panel OT-CLIMA\_ to operate the climatization command.



**Danger - Electric Shock Risk!**  
 Switch off the power before any intervention.

Handling by qualified and authorized persons only.

**Description**

The C-CLIMA4\_ is a chrono thermostat with or without RF, to keypads with OLED display, for climatization control of an area.

When the program is defined, the module controls the temperature according to the program by turning the climate control unit on and off.

This has 6 operating modes, which allows to adjust the operation of the unit to the type of installation and be associated with another control module, to monitor a second unit that works in the same space.

**Applications**

Control of air conditioning by fan-convectors in homes, shops, hospitals, clinics and hotels.

**Installation**


The C-CLIMA4\_ is mounted in a deep flush-mounting box (60 mm), where the OT-CLIMA\_ touch panel will be attached.

**Available Units**


Name	Radio Frequency
C-CLIMA4	-
C-CLIMA4RF	✓

**Features**

Programs for summer and winter temperature  
 ON / OFF control, fan speed and electro valve control  
 Allows the program edition of the C-TERMO\_ commands  
 Autonomous manual operation  
 Radio Frequency Transmitter Receiver

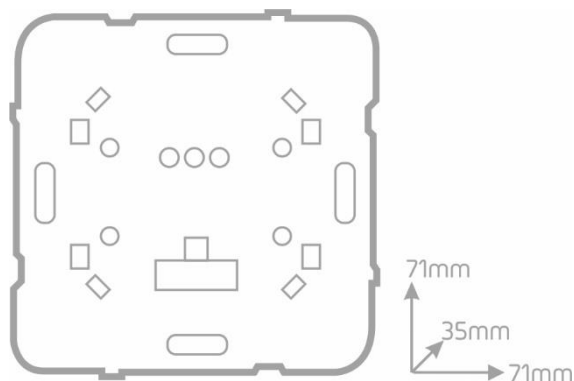



Subject to change without notice

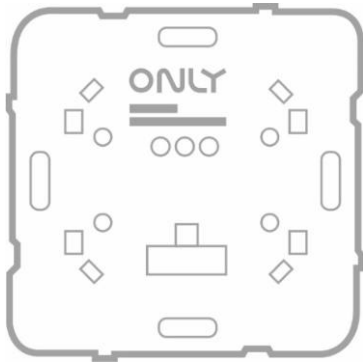

In Wall  
C-CLIMA4\_

4 outputs programmable thermostat  
with ou without RF for keypad with  
display

Connection Diagram:

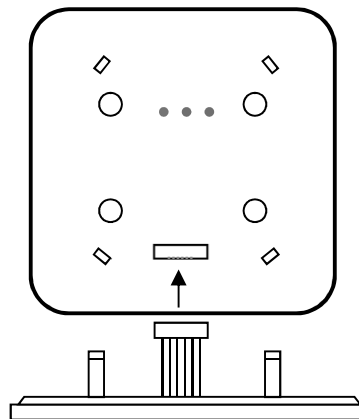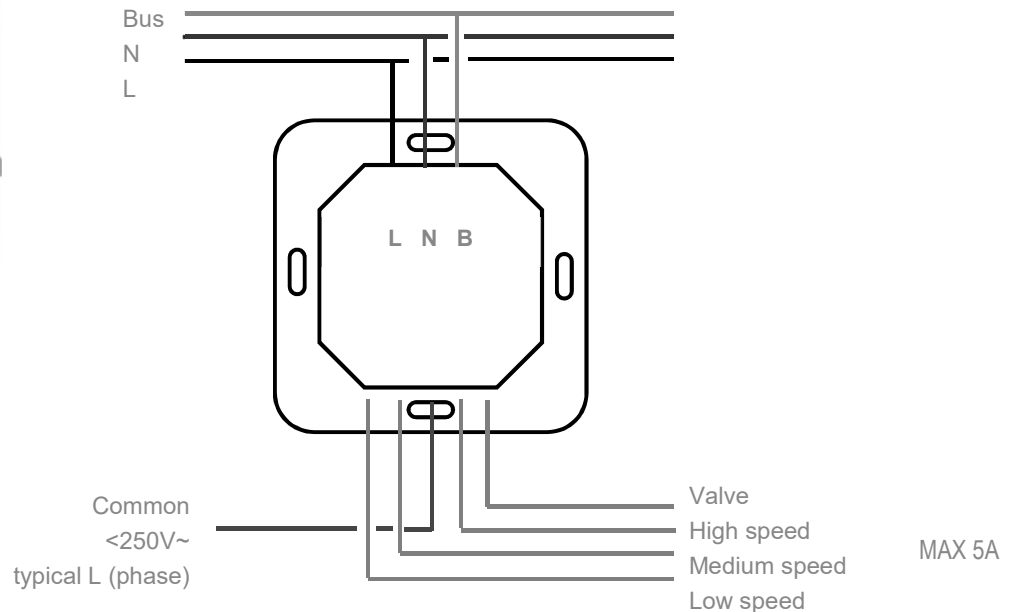

**Danger - Electric Shock Risk!**  
Switch off the power before any  
intervention.  
Handling by qualified and authorized  
persons only.

Subject to change without notice