

## In Wall C-FTC232

ONLY BUS adapter for RS232

### Technical data

Power supply	230 V ~ 50 Hz
Consumption	< 1.5 W
Ingress protection IP	IP20

### Description

The C-FTC232 is a translator of ONLY BUS automation commands ↔ RS232. From the electrical point of view, this module provides galvanic isolation between the BUS and the RS232 door..

### Applications


Connection of a computer, control or visualization device to the ONLY automation BUS.

### Installation

The C-FTC232 is mounted in a deep flush-mounting box (60 mm), receiving the cover OT-232\_. It can be installed anywhere in the BUS in an ONLY installation. The maximum RS232 cable length is 15 meters.

### Features

- Bidirectional communication
- Galvanic isolation between BUS and external device
- Push-in WAGO connectors with derivation

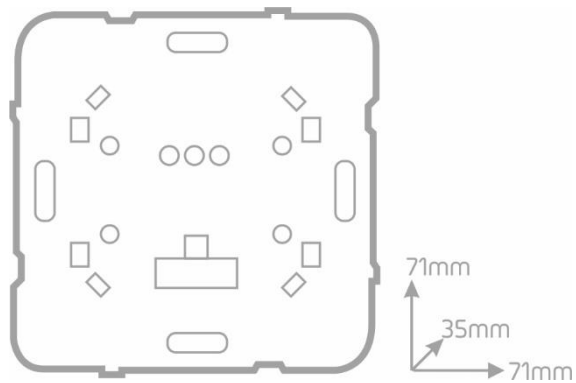

Note:

### Configuration parameters


Baudrate:	38400
Nr. of bits:	8
Stop bits:	1
Parity:	None



**Danger - Electric Shock Risk!**  
Switch off the power before any intervention.

Handling by qualified and authorized persons only.



Subject to change without notice

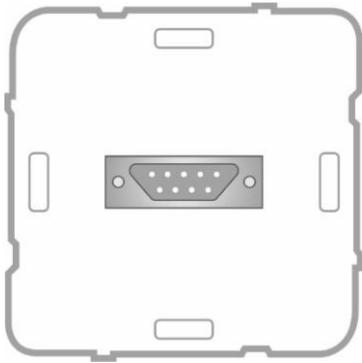

In Wall  
**C-FTC232**

ONLY BUS adapter for RS232

Connection diagram:

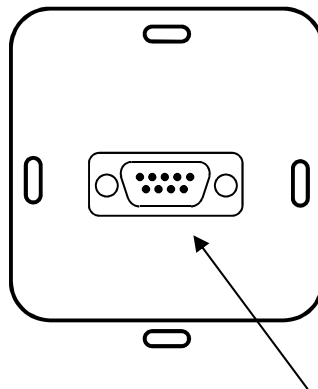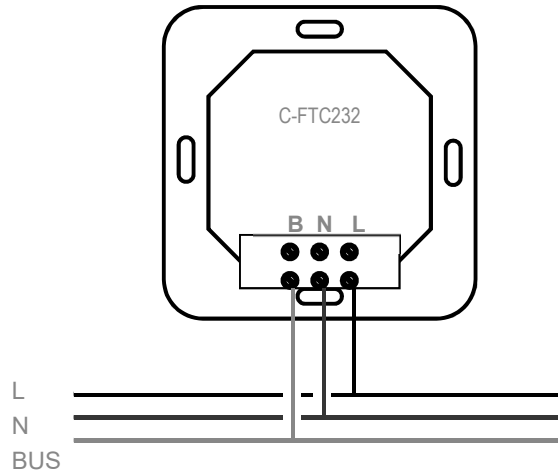

Female DB9 connector



**Danger - Electric Shock Risk!**

Switch off the power before any intervention.

Handling by qualified and authorized persons only.

Subject to change without notice