

In Wall

C-TERMO_

2 outputs programmable thermostat with ou without RF

Technical data

Power supply 110/230 V ~ 50/60 Hz
Maximum current 5 A cos Φ =1
Ingress protection IP IP20

Nota:

It is necessary the touch panel OT-TERMO_ to operate the audio command.

Do not use in electric radiating floor.



Danger - Electric Shock Risk!
Switch off the power before any intervention.

Handling by qualified and authorized persons only.

Description

The C-TERMO_ is a programable thermostat with or without RF, for climatization control of an área and can be programmed for 3 operating periods and respective temperature for each day of the week.

To operate in automatic mode, it is necessary to install at least one C-CLIMA_ module in the house, that generates the time signals needed to manage the programme. The C-TERMO_ turns on and off according to the set program, controlling the temperature

Applications

Control of climatization by boiler, radiators or water underfloor (by electro valves) in homes, shops, hospitals, clinics and hotels.

Installation


The C-TERMO_ is mounted in a deep flush-mounting box (60mm), where the touch panel will be attached.

Available Units


Name	Radio Frequency
C-TERMO	-
C-TERMORF	✓

Features

- 2 relays for control of electro valve and boiler or heatpump with 6 operating modes
- Autonomous manual operation with preset comfort temperature
- WAGO push-wire terminal connections with derivation
- Radio Frequency Transmitter Receiver

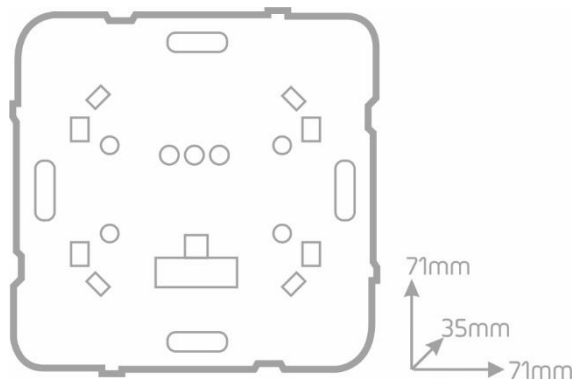


Subject to change without notice

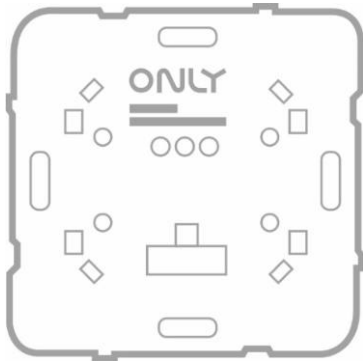

In Wall
C-TERMO_

2 outputs programmable thermostat
with ou without RF

Connection Diagram:

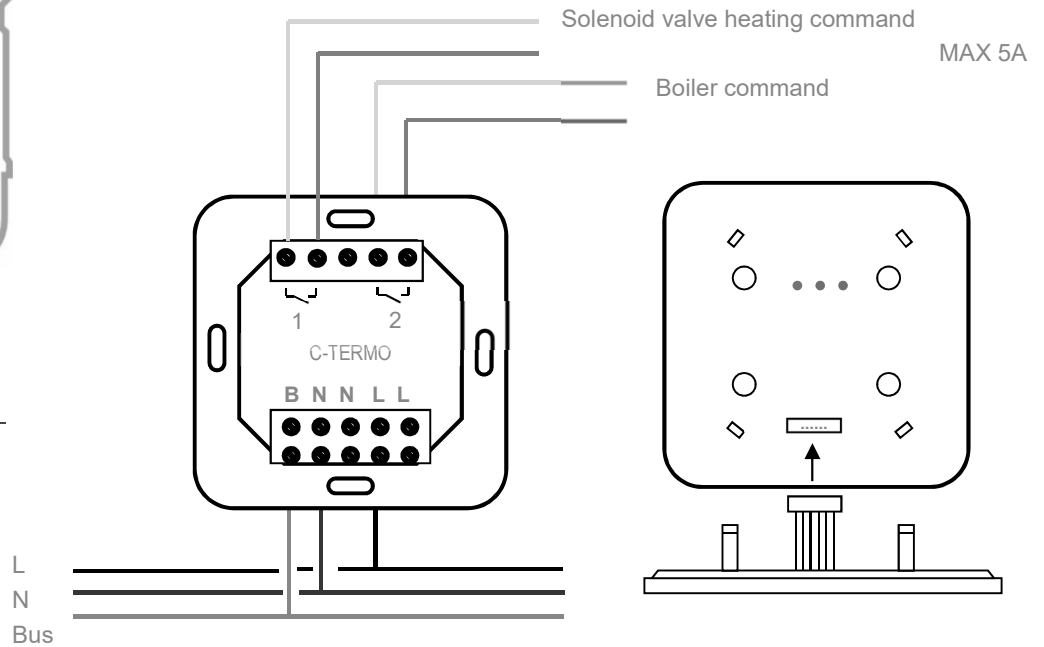

Note: A solenoid valve may be low voltage or 230V. The maximum relay current is 5 amps.



Danger - Electric Shock Risk!
Switch off the power before any intervention.

Handling by qualified and authorized persons only.

Subject to change without notice