

Only Touch

OT-T4S_

Touch panel with combined thermostat and automation 8 touch buttons.

Technical data

Power supply:

From wall command: C-_OUT_/C-1SHU_
/C-IN_/C-2MOT-RF/C-010V/C-1DIM (+24 V)
Ingress protection IP IP20

Description

The OT-T4S_ is touch panel with 8 illuminated sensors holding a sensor of temperature.

There are 4 specific keys for climate control, when associated with air conditioning modules of type C-TERMO_, C-TERMO4_, C-CLIMA_, C-CLIMA4_, D-8TERMO or D-_TERMO. The remaining keys are used for general automation control.

The buttons light up to the touch, displaying the current room temperature. When the temperature is reset, it shows the new temperature chosen for 2.5 seconds.

Applications

Climatization control.

Lights and shutters control.

Installation

The OT-T4S_ is mounted on the C-_OUT_/C-1SHU_
/C-IN_/C-2MOT-RF/C-010V/C-1DIM commands.

Available Units

Name	Color			Finish Coat		Buttons	
	White	Silver	Black	Mate	Glossy	General	Shutters
OT-T4S-GW	✓			✓		✓	
OT-T4S-GS		✓		✓		✓	
OT-T4S-GB			✓	✓		✓	
OT-T4S-SW	✓			✓			✓
OT-T4S-SS		✓		✓			✓
OT-T4S-SB			✓	✓			✓
OT-T4S-GWG	✓				✓	✓	
OT-T4S-GSG		✓			✓	✓	
OT-T4S-GBG			✓		✓	✓	
OT-T4S-SWG	✓				✓		✓
OT-T4S-SSG		✓			✓		✓
OT-T4S-SBG			✓		✓		✓

Features

8 touch-sensitive touch sensors

Temperature indication from 18 to 24° C


Built-in temperature sensor



Danger - Electric Shock Risk!


Switch off the power before any intervention.

Handling by qualified and authorized persons only.



90mm
9mm
90mm


Subject to change without notice

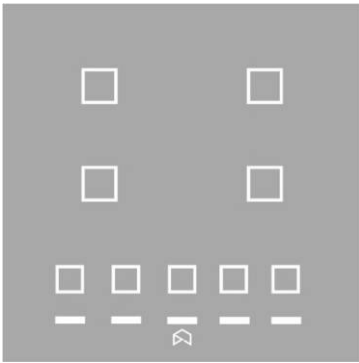

Only Touch
OT-T4S_

Touch panel with combined thermostat and automation 8 touch buttons.

Connection Diagram:

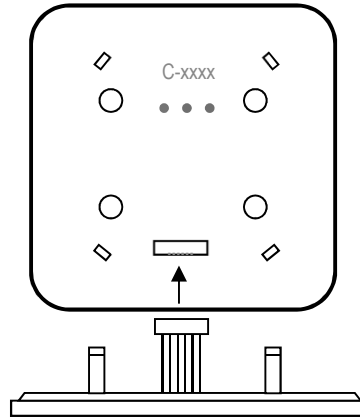

OT-4S



Danger - Electric Shock Risk!
Switch off the power before any intervention.

Handling by qualified and authorized persons only.

Subject to change without notice