

**Description**

The D-22BIN is a module for reading up to 22 binary inputs. It is indicated for monitoring the binary contacts status of opening / closing door type, window and others.

**Application**

Houses, shops, hospitals, clinics and hotels.

**Installation**


The D-22BIN is mounted on DIN rail, occupying 5 modules of 17.5 mm. Applied in installations that includes D-WEBSEVER.

**DIN Rail**  
**D-22BIN**

Module with 22 binary inputs.


**Technical data**

Power supply            110/230 V ~ 50/60 Hz  
Consumption            < 0.5 W  
Índice de proteção IP            IP20

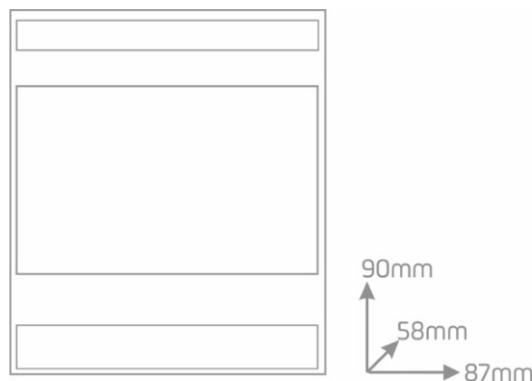

**Danger - Electric Shock Risk!**  
Switch off the power before any intervention.  
Handling by qualified and authorized persons only.


Subject to change without notice

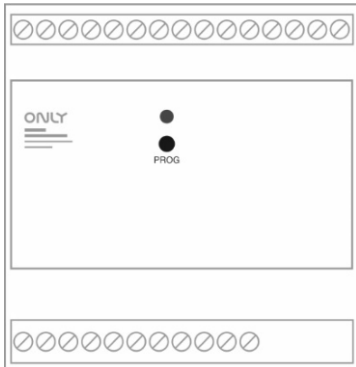

## DIN Rail D-22BIN

Module with 22 binary inputs

Connection diagram:

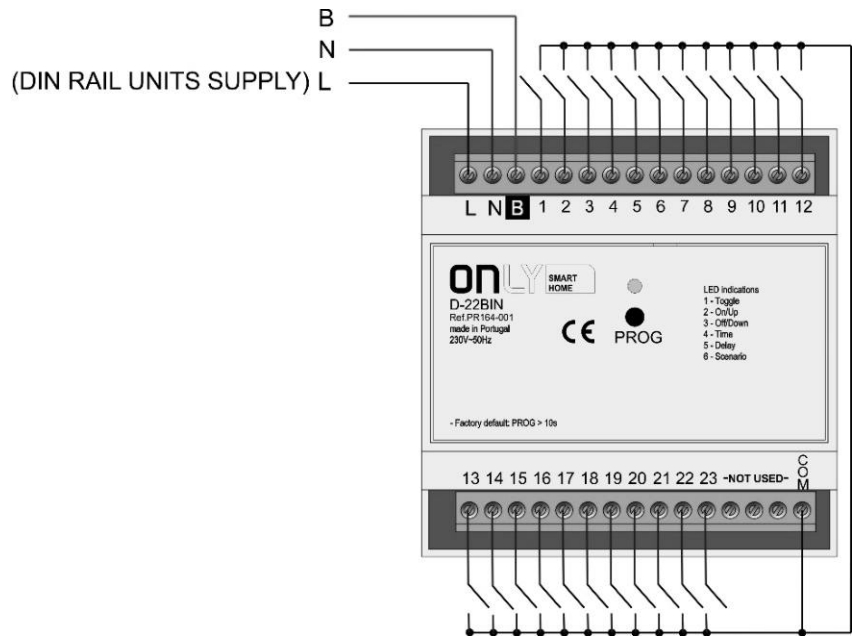

**Danger - Electric Shock Risk!**

Switch off the power before any intervention.

Handling by qualified and authorized persons only.

Subject to change without notice