

**Description**

The D-26IN is a module for reading up to 26 binary inputs. It is indicated for the push buttons integration (momentary and normally open contact) in the ONLY domotic system.

**Application**

Houses, shops, hospitals, clinics and hotels.

**Installation**

The D-26IN is mounted on DIN rail, occupying 5 modules of 17.5 mm.

**Features**

Individually configurable inputs in operation modes: Toggle, On, Off, Time, Delay or Scenario.


**DIN Rail**

**D-26IN**

Module with 26 binary inputs.

**Technical data**

Power supply 110/230 V ~ 50/60 Hz  
 Consumption < 0.5 W  
 Índice de proteção IP IP20

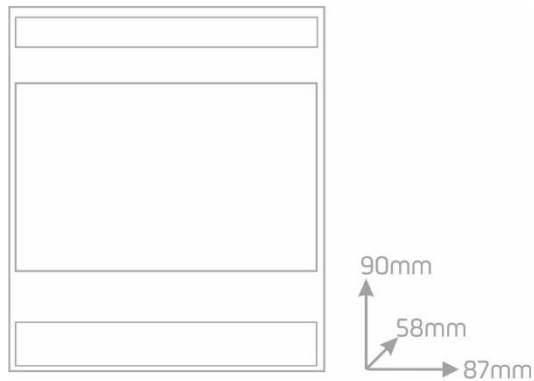

Note:

The module is provided from the factory with all inputs configured in operation mode 1 (Toggle).




**Danger - Electric Shock Risk!**

**Switch off the power before any intervention.**

**Handling by qualified and authorized persons only.**


Subject to change without notice

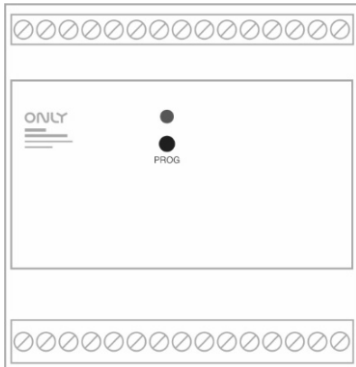

**DIN Rail**  
**D-26IN**

Module with 26 binary inputs.

Connection diagram:

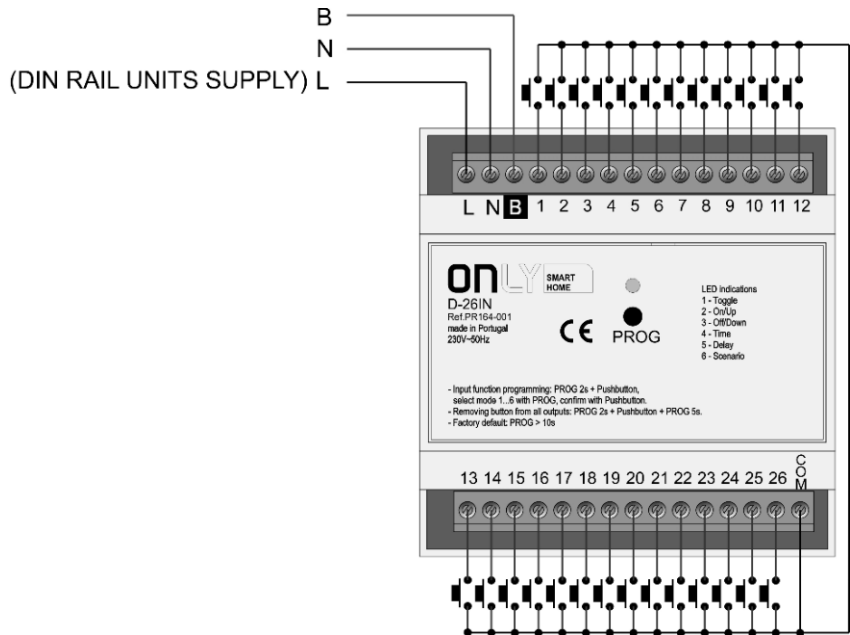

**Danger - Electric Shock Risk!**  
Switch off the power before any intervention.  
Handling by qualified and authorized persons only.

Subject to change without notice