


## ACTUATORS

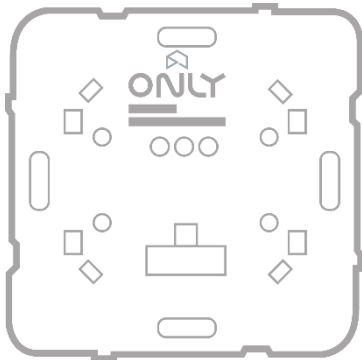

### In Wall C-2MOT\_

2 outputs actuator 5 A with or without RF

#### Technical data

Power supply 110/230V~ 50/60Hz  
Power consumption < 0.5W

#### Relay contacts:

Rated load 5A at 250VAC  
5A at 30VDC  
Max. switching voltage 250VAC, 30VDC  
Max. switching current 5A

Frequency <sup>(1)</sup> 868.3MHz  
Ingress protection IP IP20



**Danger - Electric Shock Risk!**  
Switch off the power before any intervention.

Handling by qualified and authorized persons only.

**Enancer Electrónica, Lda**  
Rua Max Grundig, 9  
4705-820 Braga Portugal  
Tel: +351 253 221 484  
info@only-smartbuildings.com

#### Description

The C-2MOT\_ is an 1s pulse actuator with 2 independent outputs of 5A with voltage free contacts.

It can be fitted with any Only wall Keypad <sup>(2)(3)</sup>.

#### Applications

Control of gates.

#### Installation

The C-2MOT\_ is to be mounted in flush-mounting electrical box (60mm between fixing points).

#### Available Modules

Name	Radio Frequency	2 Outputs
<sup>(1)</sup> C-2MOT-RF	✓	✓
C-2MOT		✓

#### Features

Pulse actuator (1s) with 2 independent 5A outputs


Status indication by LED

Local operation even without BUS connection <sup>(1)</sup>

Push-wire terminal connections with derivation

Up to 14 buttons can be stored in the internal non-volatile memory.

Radio Frequency Transceiver <sup>(1)</sup>

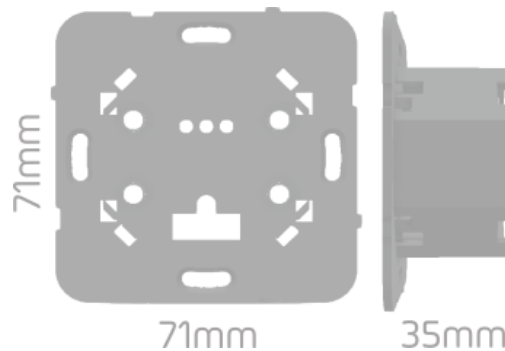

<sup>(2)</sup> Not compatible with OT-CLIMA-XY, OT-CLIMAA-XY, OT-FM-XY, OT-FMA-XY, OT-16S-XY and OT-16SD-XY

<sup>(3)</sup> C-2MOT\_ must have firmware version  $\geq$  to V4.0 to work with OT-MF-XY

Subject to change without notice

C-2MOT-RF\_R06