



In Wall  
**F-MS.01-XX (1)**

360° motion sensor

**Technical data**

Power supply (1) 12VDC or 24VDC  
Output (NO) 1A

Relay contacts:  
Rated load 0.5A at 150VAC  
1A at 24VDC

Max. switching voltage 150VAC, 60VDC  
Max. switching current 1A

Ingress protection IP IP20

**Description**

The F-MS-01-XX (1) is a 360° motion sensor with 5m range and an 1A relay output.

**Application**

Motion sensor for lighting control in homes, shops, hospitals, clinics and hotels.

**Installation**

Hidden installation. Can be installed on the ceiling or wall.


Sold with box H:35mm, Ø 42.5mm

**Available Modules**

Name	Power supply 12VDC	Power supply 24VDC	NO output
(1) F-MS.01-12V	✓		✓
(1) F-MS.01-24V		✓	✓

**Features**

Compact  
360°  
5m range  
NO relay output

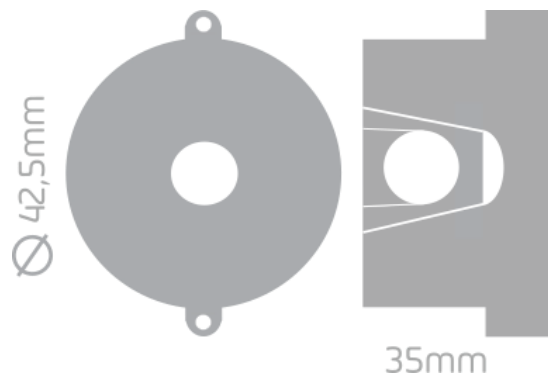

**Danger - Electric Shock Risk!**  
Switch off the power before any intervention.

Handling by qualified and authorized persons only.

(1) Versions with power supply of 12VDC or 24VDC (see table Available modules)

Subject to change without notice

F-MS.01-XX\_R06

**Enancer Electrónica, Lda**

Rua Max Grundig, 9  
4705-820 Braga Portugal  
Tel: +351 253 221 484  
info@only-smartbuildings.com