

In Wall S-4IN-4B

4 binary inputs command with 4 buttons

Technical data

Power supply	110/230 V ~ 50/60 Hz
Consumption	< 0.5 W
Ingress protection IP	IP20

Description

The S-4IN-4B is a 4 binary inputs command to push buttons.

It is indicated for locations where command buttons are required, but no load switching is required at that location.

The S-4IN-4B can read up to 4 external push buttons connected to the front connector by an specific cable. The contacts must be normally open type.

The 4 buttons can be used to control any output or group outputs of the system.

Application

Interface for push buttons.

Installation

The S-4IN-4B is mounted in a deep flush-mounting box (60 mm).

If necessary, it is ready to break the 4 corners of the fixing frame and allows installation inside the box, behind any other control gear. In this case, at least 85 mm depth is required.


Features

Reading of 4 independent buttons.

Supply of contact voltage by the command.

Operation mode: Toggle, On, Off, Time, Delay or Scenario.


WAGO push-wire connection with derivation.

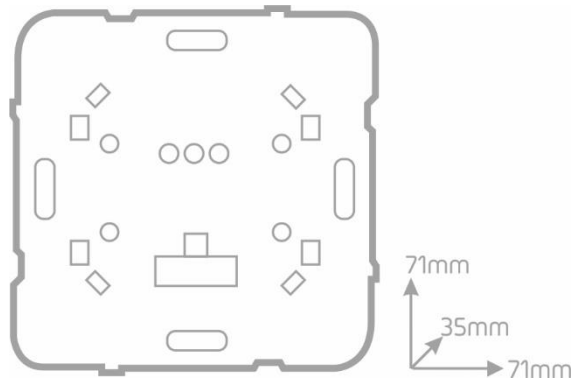

Danger - Electric Shock Risk!
Switch off the power before any intervention.

Handling by qualified and authorized persons only.



Subject to change without notice

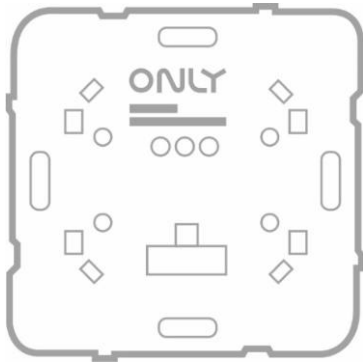

In Wall
S-4IN-4B

4 binary inputs command with 4 buttons

Connection diagram:

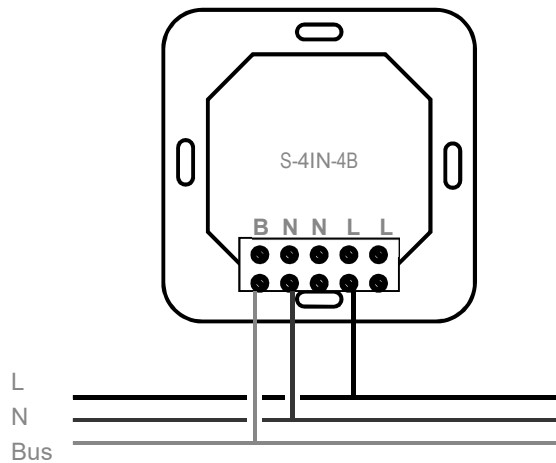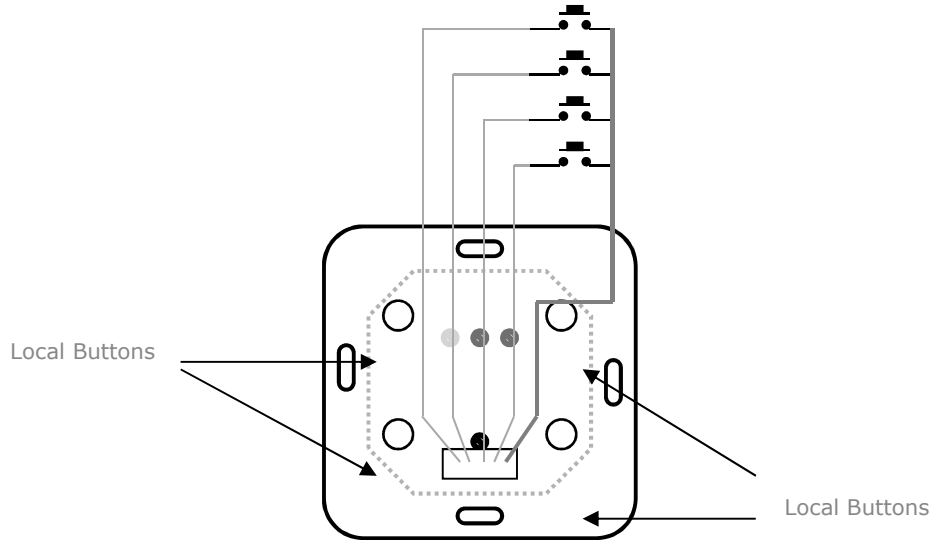

Danger - Electric Shock Risk!
Switch off the power before any intervention.
Handling by qualified and authorized persons only.

Subject to change without notice