

In Wall
C-FTC232

ONLY BUS adapter for RS232

Technical data

| | |
|-----------------------|---------------|
| Power supply | 230 V ~ 50 Hz |
| Consumption | < 1.5 W |
| Ingress protection IP | IP20 |

Description

The C-FTC232 is a translator of ONLY BUS automation commands ↔ RS232. From the electrical point of view, this module provides galvanic isolation between the BUS and the RS232 door..

Applications


Connection of a computer, control or visualization device to the ONLY automation BUS.

Installation

The C-FTC232 is mounted in a deep flush-mounting box (60 mm), receiving the cover OT-232_. It can be installed anywhere in the BUS in an ONLY installation. The maximum RS232 cable length is 15 meters.

Features

Bidirectional communication
Galvanic isolation between BUS and external device
Push-in WAGO connectors with derivation

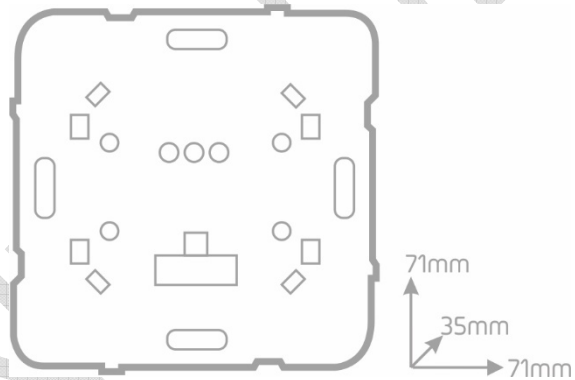

Note:

Configuration parameters


| | |
|--------------|-------|
| Baudrate: | 38400 |
| Nr. of bits: | 8 |
| Stop bits: | 1 |
| Parity: | None |



Danger - Electric Shock Risk!
Switch off the power before any intervention.

Handling by qualified and authorized persons only.



Subject to change without notice

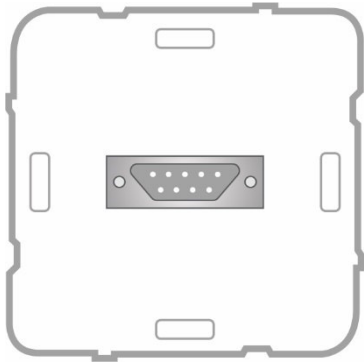

In Wall
C-FTC232

ONLY BUS adapter for RS232

Connection diagram:

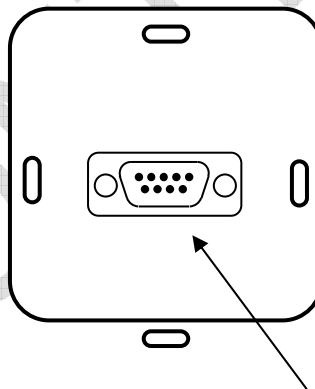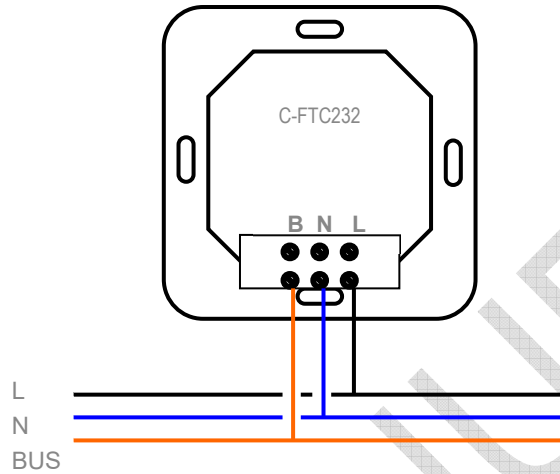

Female DB9 connector



Danger - Electric Shock Risk!
Switch off the power before any intervention.
Handling by qualified and authorized persons only.

Subject to change without notice