

Description

The D-8TERMO is a DIN rail climate control actuator to control the ambient air heating / cooling systems. This control is made by potential-free relay contacts.

For control and information of the air temperature, each thermostat must be paired to a wall keypad of the type OT-T_S_ / OT-MF installed on any command C-_OUT_, C-1SHU, C-IN_, etc.

Applications

Control of climatization by boiler, radiators or radiant floor in homes, shops, hospitals, clinics and hotels.

Installation

The D-8TERMO is made for DIN rail mounting, occupying 5 modules of 17.5 mm.

Features

Allows the outputs manual control with status indication by LED's

Allows independent control of 8 zones.

DIN Rail

D-8TERMO

DIN Rail 8-channel independent and programmable thermostat actuator

Technical data

Power supply	110/230 V ~ 50/60 Hz
Consumption	< 1.5 W
Maximum current	16 A cos Φ =1
Ingress protection IP	IP20




Danger - Electric Shock Risk!


Switch off the power before any intervention.

Handling by qualified and authorized persons only.

Subject to change without notice

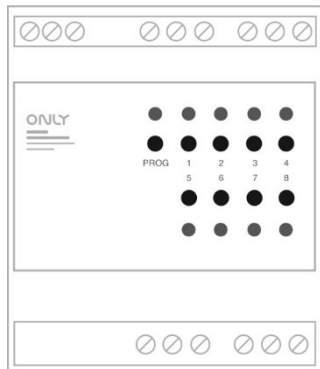

Connection Diagram:

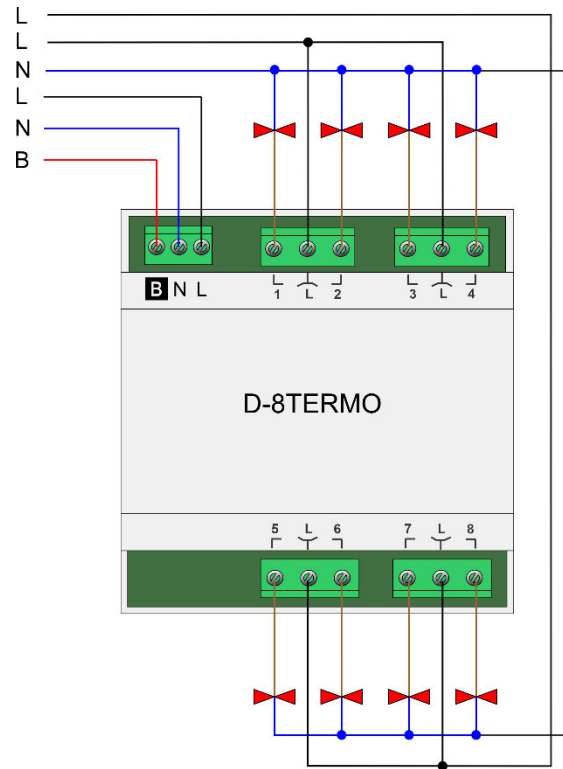

DIN Rail D-8TERMO

DIN Rail 8-channel independent and programmable thermostat actuator



Danger - Electric Shock Risk!
Switch off the power before any intervention.
Handling by qualified and authorized persons only.

Subject to change without notice