**In Wall****C-CLIMA4_**

4 outputs programmable thermostat with or without RF for keypad with display

Technical data

Power supply 110/230 V ~ 50/60 Hz
 Maximum current 5 A cos $\Phi = 1$
 Ingress protection IP IP20

Note:

It is necessary the touch panel OT-CLIMA_ to operate the climatization command.



Danger - Electric Shock Risk!
 Switch off the power before any intervention.

Handling by qualified and authorized persons only.

Description

The C-CLIMA4_ is a chrono thermostat with or without RF, to keypads with OLED display, for climatization control of an area.

When the program is defined, the module controls the temperature according to the program by turning the climate control unit on and off.

This has 6 operating modes, which allows to adjust the operation of the unit to the type of installation and be associated with another control module, to monitor a second unit that works in the same space.

Applications

Control of air conditioning by fan-convectors in homes, shops, hospitals, clinics and hotels.

Installation


The C-CLIMA4_ is mounted in a deep flush-mounting box (60 mm), where the OT-CLIMA_ touch panel will be attached.

Available Units

Name	Radio Frequency
C-CLIMA4	-
C-CLIMA4RF	✓


Features

Programs for summer and winter temperature
 ON / OFF control, fan speed and electro valve control
 Allows the program edition of the C-TERMO_ commands
 Autonomous manual operation
 Radio Frequency Transmitter Receiver

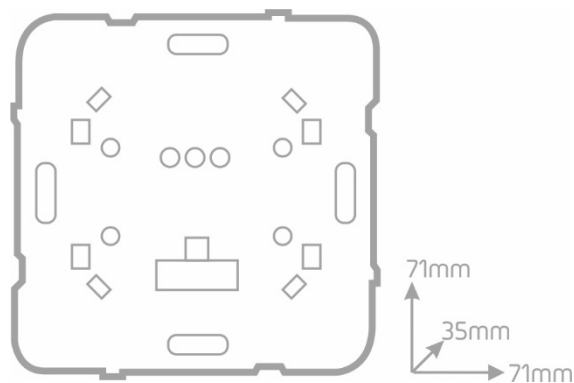

71mm
 35mm
 71mm



Subject to change without notice

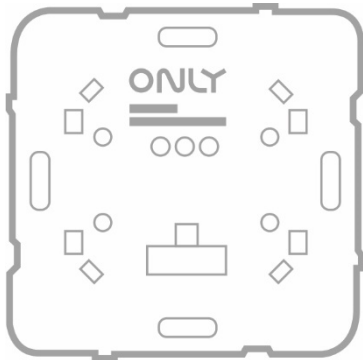

In Wall
C-CLIMA4_

4 outputs programmable thermostat with ou without RF for keypad with display

Connection Diagram:

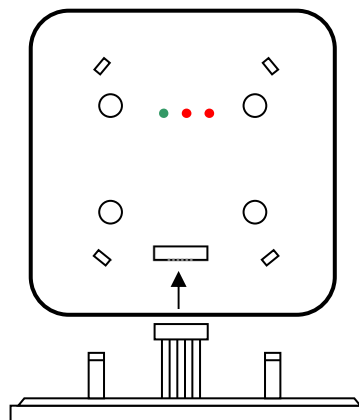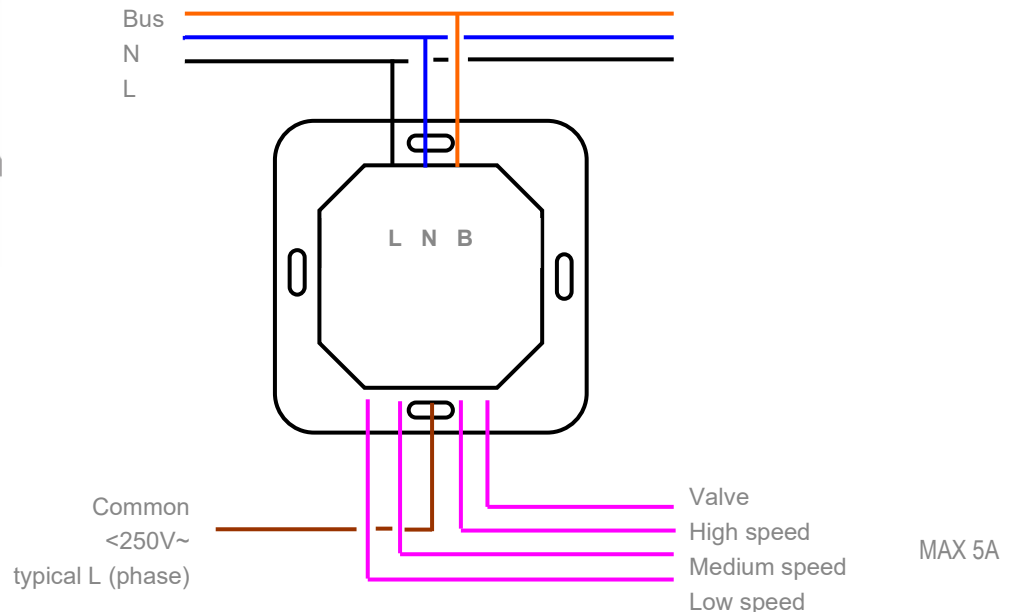

Danger - Electric Shock Risk!
Switch off the power before any intervention.
Handling by qualified and authorized persons only.

Subject to change without notice