



DIN Rail D-4OUT

DIN Rail 4 outputs ON/OFF actuator 16 A

Technical data

Power supply	110/230 V ~ 50/60 Hz
Power consumption	< 0.5 W
Maximum load current	16 A cos Φ =1
Inrush current	165 A / 20 ms
Ingress protection IP	IP20

Description

The D-4OUT is an ON/OFF actuator to switch up to 4 independent loads of up to 16 A. The outputs are made with independent voltage free contacts. It is therefore possible to switch lines of several phases including low-voltage signals.

The supply of the module is independent from the loads.

Applications

Switching of lights, switches, contactors, irrigation systems or other switchable loads in homes, shops, hospitals, clinics and hotels.

Installation

The D-4OUT is mounted on DIN Rail, occupying 3 modules of 17.5 mm.

Features

ON/OFF actuator with bi-stable relays for 4 outputs of 16 A


Local operation even without BUS connection

Status indication by LED

Memorizing different values for various scenarios

Up to 20 buttons can be stored in the internal non-volatile memory.

Operation modes: Toggle, ON, OFF, Timer, Delay and Scenario, depending on the received command

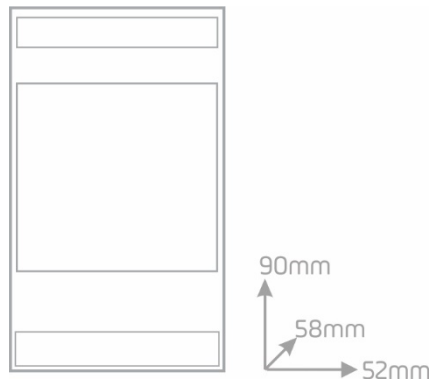

Danger - Electric Shock Risk!

Switch off the power before any intervention.

Handling by qualified and authorized persons only.

Subject to change without notice

Enancer Electrónica, Lda


Rua Max Grundig, 9
4705-820 Braga Portugal
Tel: +351 253 221 484
info@only-smartbuildings.com



DIN Rail D-4OUT

DIN Rail 4 outputs ON/OFF actuator 16 A

Connection diagram:

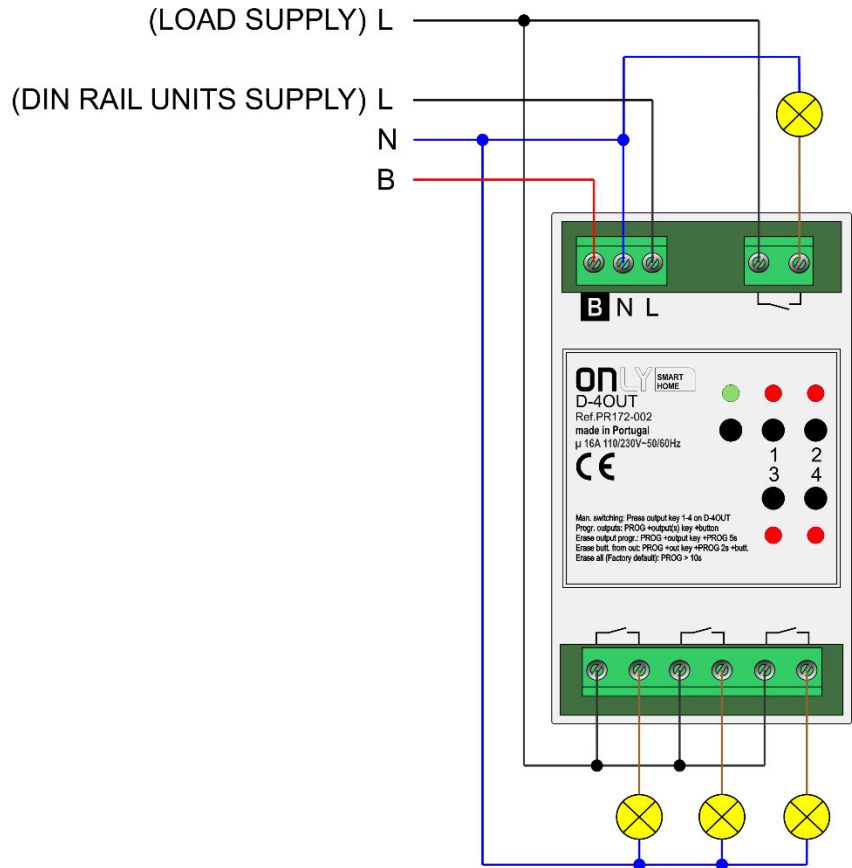

Danger - Electric Shock Risk!
Switch off the power before any intervention.

Handling by qualified and authorized persons only.

Subject to change without notice