

DIN Rail

D-22BIN

Module with 22 binary inputs.

Technical data

Power supply 110/230 V ~ 50/60 Hz
Consumption < 0.5 W
Índice de proteção IP IP20

Description

The D-22BIN is a module for reading up to 22 binary inputs.

It is indicated for monitoring the binary contacts status of opening / closing door type, window and others.


Application

Houses, shops, hospitals, clinics and hotels.

Installation

The D-22BIN is mounted on DIN rail, occupying 5 modules of 17.5 mm.

Applied in installations that includes D-WEBSERVER, D-WSX1 or D-WSX1-ZW.

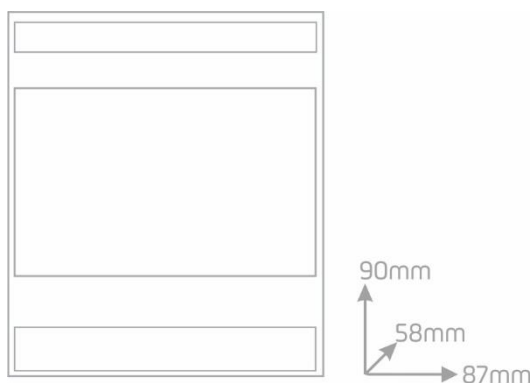

Danger - Electric Shock Risk!

Switch off the power before any intervention.

Handling by qualified and authorized persons only.

Subject to change without notice