

In Wall

## C-CLIMA-MB

Modbus RTU interface for the control of Air Conditioners.

### Technical data

Power supply	110/230V~ 50/60Hz
Interfaces	Automation ONLY Bus EIA485 half-duplex
Ingress protection IP	IP20

### Note:

To operate the C-CLIMA-MB, it must be installed in a keypad OT-MF-xx, which can be located in the C-CLIMA-MB or remotely in another wall module version 4.x.



**Danger - Electric Shock Risk!**  
Switch off the power before any intervention.

Handling by qualified and authorized persons only.

### Description

The C-CLIMA-MB is a programmable thermostat for the climatization control of areas that include an A/C unit.

Each C-CLIMA-MB can control only one A/C machine. This module is always the "Master" in the communication, and the A/C machine (with Modbus <sup>(1)</sup> interface) the "Slave".

### Applications


Climatization control of areas including an A/C unit.

### Installation

The C-CLIMA-MB is to be mounted in an electrical flush-mounting box (60mm between fixing points).

### Features

- Modbus RTU (EIA-485) communication.
- Push-wire terminal connections with derivation.

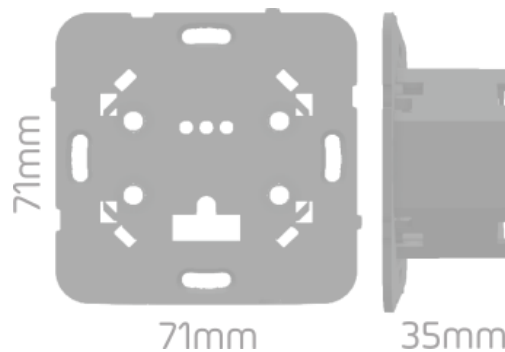

<sup>(1)</sup> Integration with Intesisbox.

Subject to change without notice

C-CLIMA-MB\_R06

Enancer Electrónica, Lda

Rua Max Grundig, 9  
4705-820 Braga Portugal  
Tel: +351 253 221 484  
info@only-smartbuildings.com