

In Wall
HKI-C.IN-24

Interface module for keypads ONLY.

Technical data

Power supply	24VDC
Power consumption	< 0.5W
Ingress protection IP	IP20

European Directives

2014/30/EU	EMC Directive
2011/65/EU	RoHS 3 Directive

Description

The HKI-C.IN-24 is an interface module enabling the snapping of any Only keypad ⁽¹⁾. It is indicated in places where it is not necessary to switch any load but a keypad is required.

Application


Interface between the Only automation system and respective keypads.

Installation

The HKI-C.IN-24 is to be mounted in flush-mounting electrical box (60mm between fixing points).

Features

Terminal block connectors.

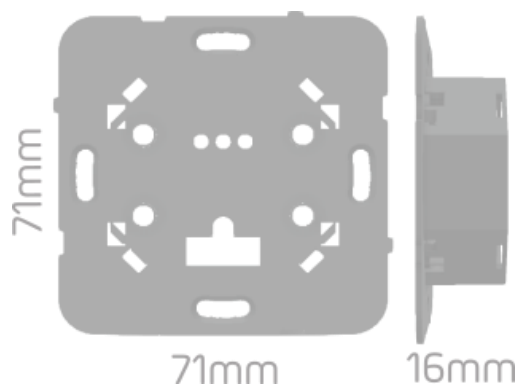

Danger - Electric Shock Risk
Switch off the power before any intervention.

Handling by qualified and authorized persons only.

⁽¹⁾ Not compatible with HKT-SCD-XY, HKT-TC.D.4-XY, HKT-RES-XY, HKT-RID-XY.

Subject to change without notice

HKI-C.IN-24_R06

Enancer Electrónica, Lda

Rua Max Grundig, 9
4705-820 Braga Portugal
Tel: +351 253 221 484
info@only-smartbuildings.com