

**DIN Rail
D-2SHU**

2 channel window shutter actuator

Technical data

Power supply 110/230V~ 50/60Hz
Power consumption < 0.5W

Contact rating:

Resistive load 8A 250VAC
Max. switching voltage 440VAC
Max. switching current 8A
Max. switching power 2000VA

Ingress protection IP IP20

Description

The D-2SHU is an actuator to control 2 independent blinds.

The outputs are potential-free relay contacts, allowing lines of different phases to be switched, including low voltage signals.

Applications


Control of shutters, sunscreens, blinds, curtains, projection screens and black-outs at homes, shops, hospitals, clinics and hotels.

Installation

The D-2SHU is to be mounted on DIN Rail, occupying 3 modules of 17.5mm.

Features

8A relay outputs
Local operation even without BUS
LED status indication

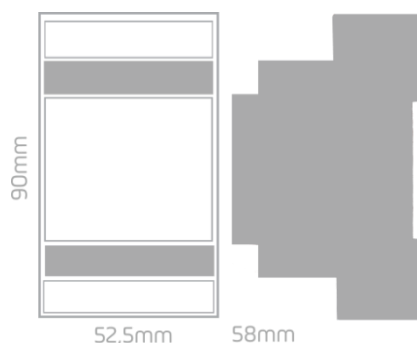

Danger - Electric Shock Risk!

Switch off the power before any intervention.

Handling by qualified and authorized persons only.

Subject to change without notice

D-2SHU_R06

Enancer Electrónica, Lda

Rua Max Grundig, 9
4705-820 Braga Portugal
Tel: +351 253 221 484
info@only-smartbuildings.com