

DIN Rail D-4SHU_

4-channel window shutter actuator
with or without 4 binary inputs

Technical data

Power supply 110/230V~ 50/60Hz
Power consumption < 0.5W

Contact rating:

Resistive load 8A 250VAC
Max. switching voltage 440VAC
Max. switching current 8A
Max. switching power 2000VA

Ingress protection IP IP20

Inputs 24VDC detection

Description

The D-4SHU is an actuator to control up to 4 independent blinds.

The outputs are potential-free relay contacts, allowing lines of different phases to be switched, including low voltage signals.

In the module with 4 binary inputs, these can be used for the reading of push buttons, auxiliary contacts or detectors.

Applications

Control of shutters, sunscreens, blinds, curtains, projection screens and black-outs at homes, shops, hospitals, clinics and hotels.

Installation

The D-4SHU_ is to be mounted in DIN Rail, occupying 5 modules of 17.5 mm.

Available Modules

Name	4 Binary Inputs	4 Outputs
D-4SHU		✓
D-4SHU-4IN ⁽¹⁾	✓	✓


Features

8A relay outputs

Local operation even without BUS

LED status indication

⁽¹⁾ Model with 4 galvanically isolated binary inputs

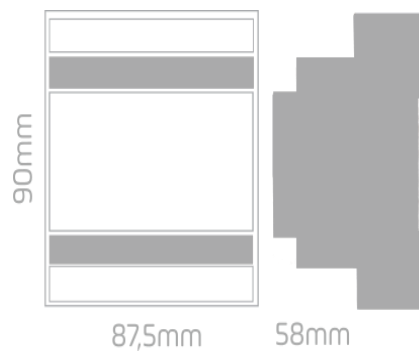

Danger - Electric Shock Risk!
Switch off the power before any
intervention.

Handling by qualified and authorized
persons only.

Enancer Electrónica, Lda

Rua Max Grundig, 9
4705-820 Braga Portugal
Tel: +351 253 221 484
info@only-smartbuildings.com