



DIN Rail D-TERMO4

Programmable thermostat

Technical data

Power supply 110/230V~ 50/60Hz
Consumption < 0.5W

Relay contacts:

Rated load 5A at 250VAC
5A at 30VDC

Max. switching voltage 250VAC, 30VDC

Max. switching current 5A

Ingress protection IP IP20

Description

The D-TERMO4 is a programmable thermostat to control 2-pipe Fan Coil Units. It incorporates 4 relays with a common point that can range from low DC voltage to 230VAC.

The D-TERMO4 needs to be installed in a keypad with air temperature sensor (OT-T_S-XY or OT-MF-XY ⁽¹⁾).

Applications

Control of climatization by 2-pipe FCU's at homes, shops, hospitals, clinics and hotels.


Installation

The D-TERMO4 is to be mounted on DIN Rail, occupying 2 modules of 17.5 mm.

Features

3 speed ventilation.

Heating or cooling electrothermal shut-off valve.

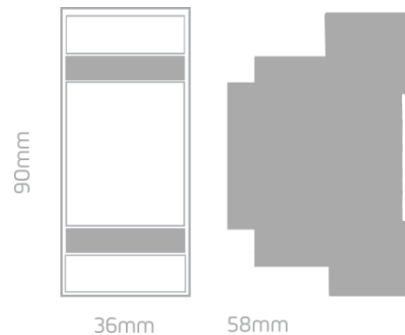

Danger - Electric Shock Risk!
Switch off the power before any intervention.

Handling by qualified and authorized persons only.

⁽¹⁾ D-TERMO4 must have firmware version \geq V4.0 to work with OT-MF-XY

Subject to change without notice

D-TERMO4_R06

Enancer Electrónica, Lda

Rua Max Grundig, 9
4705-820 Braga Portugal
Tel: +351 253 221 484
info@only-smartbuildings.com