



DIN Rail D.WSX1_

Multiprotocol server Only

Technical data

Power supply 110/230V ~ 50/60Hz
Power consumption ≤1.5W

Ingress protection IP IP20

Description

The D.WSX1_ is a multiprotocol server for managing and operating the entire automation installation.

Access is via the native BeOnly application, with the possibility of customizing the user experience.

It must be connected to the installation's local network using a UDP/FTP cable to a port on the Router/Switch.

It has backup power to perform a (controlled) shutdown in the event of a power failure.

Applications

Control and management of the entire installation via APP.

Installation


The D.WSX1_ is to be mounted on DIN Rail, occupying 8 modules of 17.5 mm.

Available modules

Name	KNX	Z-WAVE
D-WSX1	✓	
D-WSX1-ZW	✓	✓

Features

1 KNX connector
1 RS485 connector
1 USB 2.0, *Type A*
Backup battery (4x AAA 1.2V NIMH, included)
App BeOnly, for Android and IOS

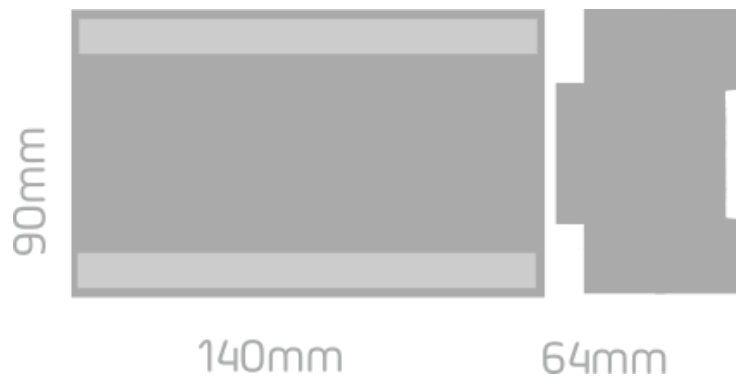

Danger - Electric Shock Risk!
Switch off the power before any
intervention.

Handling by qualified and authorized
persons only.

Subject to change without notice

D.WSX1_R06

Enancer Electrónica, Lda

Rua Max Grundig, 9
4705-820 Braga Portugal
Tel: +351 253 221 484
info@only-smartbuildings.com