

DIN Rail D-22BIN

Module with 22 binary inputs.

Technical data

Power supply 110/230V~ 50/60Hz
 Consumption < 0.5W
 Current per input 5mA

Índice de proteção IP IP20

Description

The D-22BIN ⁽¹⁾ is a module with up to 22 binary inputs.


It is indicated for monitoring the binary contacts status of opening / closing doors, windows and others.

Application

Houses, shops, hospitals, clinics and hotels.

Installation

The D-22BIN is to be mounted on DIN rail, occupying 5 modules of 17.5 mm.

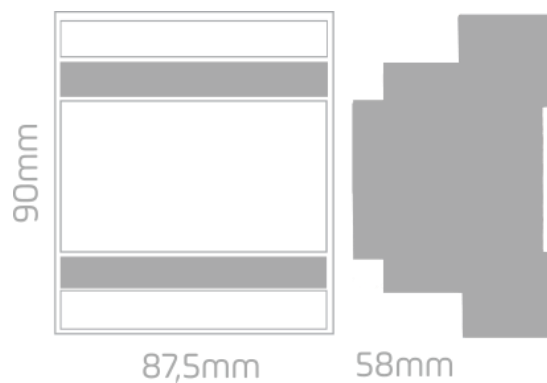

Danger - Electric Shock Risk!
 Switch off the power before any
 intervention.

**Handling by qualified and authorized
 persons only.**

⁽¹⁾ Applied only in installations that include D-WEBSEVER, D-WSX1 or D-WSX1-ZW

Subject to change without notice

D-22BIN_R06

Enancer Electrónica, Lda

Rua Max Grundig, 9
 4705-820 Braga Portugal
 Tel: +351 253 221 484
 info@only-smartbuildings.com