

DIN Rail

D-4MOT 16A

1s pulse actuator with 4 independent outputs of 16A

Technical data

Power supply 110/230V~ 50/60Hz
Power consumption < 0.5W

Contact rating:

Resistive load 16A / 250VAC
Incandescent Lamp 3500W / 277VAC
Inrush current 165A / 20ms
LED (Electronic ballast) 492A / 1.5ms
Max. switching voltage 480VAC
Max. switching current 16A
Max. switching power 4000VA

Ingress protection IP IP20

Description

The D-4MOT 16A is an 1s pulse actuator with 4 independent outputs of 16A with voltage free contacts.

In case of predominantly inductive or capacitive loads a drastic reduction of switching capacity has to be considered in order to avoid premature damaging of the relay contacts.

Applications

Gates control.

Installation

The D-4MOT 16A is to be mounted in DIN Rail, occupying 3 modules of 17.5mm.

Features


Pulse actuator (1s) with 4 independent 16A outputs

Local operation even without BUS connection

Status indication by LED

Up to 20 buttons can be stored in the internal non-volatile memory.

Operation modes: Toggle, ON, OFF, Timer, Delay and Scenario, depending on the received command

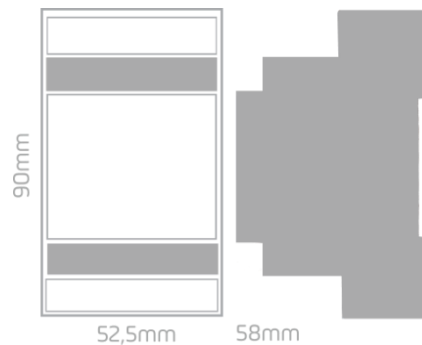

Danger - Electric Shock Risk!

Switch off the power before any intervention.

Handling by qualified and authorized persons only.

Subject to change without notice

D-4MOT 16A_R06

Enancer Electrónica, Lda

Rua Max Grundig, 9
4705-820 Braga Portugal
Tel: +351 253 221 484
info@only-smartbuildings.com