



DIN Rail D-1DIM

1 channel phase-cut R, C dimming actuator 300W

Technical data

Power supply	110/230V~ 50/60Hz
Consumption	< 1.5W
Maximum power load	300W
Ingress protection IP	IP20

Description

The D-1DIM is a dimmer for resistive or capacitive loads of 300W.

It allows, the light dimming of incandescent or halogen lamps (even when associated to electronic transformers) or other lamps with dimmable electronic drivers.

Applications

Intensity control of the incandescent and halogen lights (with or without electronic transformer) in homes, shops, hospitals, clinics and hotels.

Installation

The D-1DIM is to be mounted on DIN Rail, occupying 2 modules of 17.5 mm.

Features

Dimming from 0 to 100% with gradual increasing


Local operation even without BUS connection

Status indication by LED

Automatic memory of last selected light level

Up to 28 buttons can be stored in the internal non-volatile memory.

Operation modes: Toggle, Up, Down, Timer, Delay and Scenario, depending on the received command

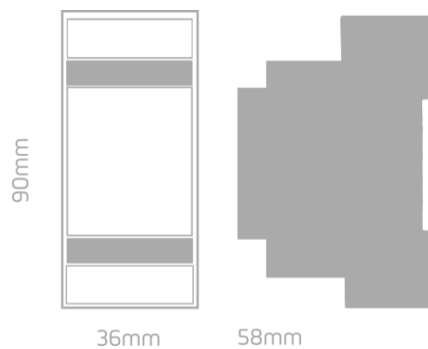

Note:

This dimmer cannot be used with ferromagnetic transformers.



Danger - Electric Shock Risk!
Switch off the power before any intervention.

Handling by qualified and authorized persons only.

Subject to change without notice

D-1DIM_R06